


# HX6408

## 512K x 8 STATIC RAM

The monolithic 512K x 8 Radiation Hardened Static RAM is a high performance 524,288 word x 8-bit static random access memory. It is fabricated with Honeywell's radiation hardened technology. It is QML qualified and is designed for use in systems operating in radiation environments. The SRAM operates over the full military temperature range and requires only a single 3.3V power supply. The SRAM is available with CMOS compatible I/O. Power consumption is typically 710mW at 40MHz operation and less than 5mW when de-selected. SRAM operation is fully asynchronous, with a typical access time of 20ns. It is available in package and known good die forms.

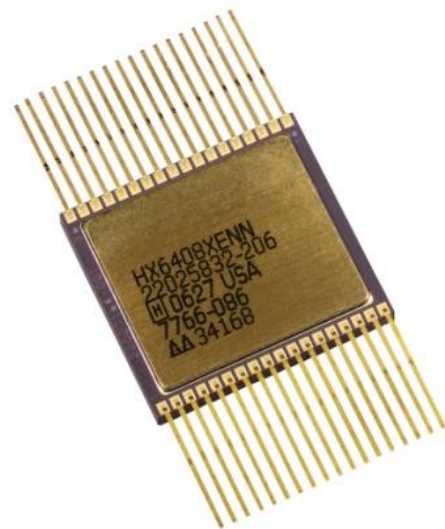

Honeywell's enhanced SOI RICMOS™ V (Radiation Insensitive CMOS) technology is radiation hardened through the use of advanced and proprietary design, layout, and process hardening techniques. The RICMOS™ V low power process is a 3.3V, SOI CMOS technology with an 80 angstrom gate oxide and a minimum drawn feature size of 0.35um.


The memory cell is single event upset hardened, while multi-layer metal power busing and small collection volumes of SOI provides superior single event effect and dose rate hardening.

### FEATURES

- Fabricated with RICMOS™ V Silicon on Insulator (SOI)
- 0.35um Low Power Process (Leff = 0.28um)
- High Speed  
20ns Typical Write Cycle  
20ns Typical Read Cycle
- Asynchronous Operation
- CMOS Compatible I/O
- Total Dose  $1 \times 10^6$  rad(Si)
- Soft Error Rate  
 $1 \times 10^{-10}$  upsets/bit-day
- Neutron Irradiation  $1 \times 10^{14}$  n/cm<sup>2</sup>
- Dose Rate Upset  
 $1 \times 10^{10}$  rad(Si)/s
- Dose Rate Survivability  
 $1 \times 10^{12}$  rad(Si)/s
- Latchup Immune
- VDD Power Supply  
3.3V
- Operating Temperature Range  
-55°C to +125°C
- Optional Low Power Sleep Mode
- 36-Lead Ceramic Flat Pack Package
- QML Qualified  
SMD 5962-06203

# HX6408

## SIMPLIFIED FUNCTIONAL BLOCK DIAGRAM

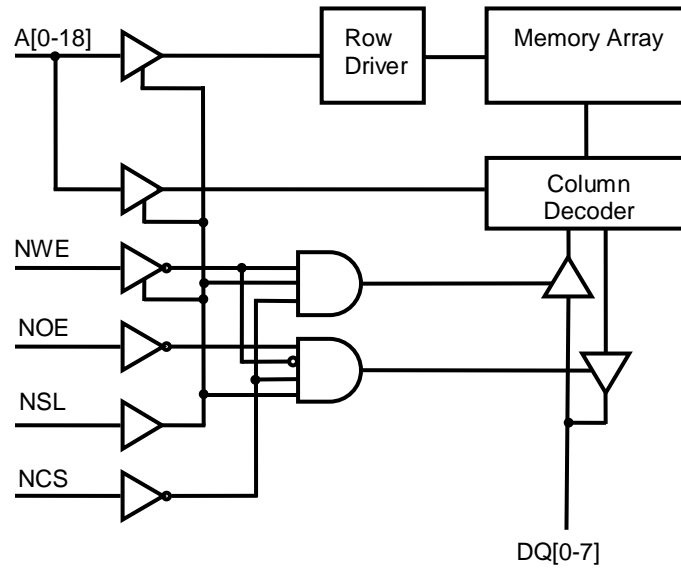

## 36 LEAD FLAT PACK PINOUT

| HX6408<br>Top View |    |    |     |
|--------------------|----|----|-----|
| A0                 | 1  | 36 | NSL |
| A1                 | 2  | 35 | A18 |
| A2                 | 3  | 34 | A17 |
| A3                 | 4  | 33 | A16 |
| A4                 | 5  | 32 | A15 |
| NCS                | 6  | 31 | NOE |
| D0                 | 7  | 30 | D4  |
| D1                 | 8  | 29 | D5  |
| VDD                | 9  | 28 | VSS |
| VSS                | 10 | 27 | VDD |
| D2                 | 11 | 26 | D6  |
| D3                 | 12 | 25 | D7  |
| NWE                | 13 | 24 | A14 |
| A5                 | 14 | 23 | A13 |
| A6                 | 15 | 22 | A12 |
| A7                 | 16 | 21 | A11 |
| A8                 | 17 | 20 | A10 |
| A9                 | 18 | 19 | NC* |

\* NC pin must be connected to VSS.

## PIN NAME DEFINITIONS

| Pin Name | Timing Symbol | Definition                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A[0-18]  | A             | Address input pins. Selects a particular 8-bit word within the memory array.                                                                                                                                                                                                                                                                                                                                            |
| DQ[0-7]  | D<br>Q        | Bi-directional data I/O pins. Data inputs (D) during a write operation. Data outputs (Q) during a read operation.                                                                                                                                                                                                                                                                                                       |
| NCS      | S             | Negative chip select. Low allows normal read or write operation. High puts the SRAM into a deselected condition and holds the data output drivers in a high impedance (High-Z) state. If not used, it must be connected to VSS.                                                                                                                                                                                         |
| NWE      | W             | Negative write enable. Low activates a write operation and holds the data output drivers in a high impedance (High-Z) state. High allows normal read operation.                                                                                                                                                                                                                                                         |
| NOE      | G             | Negative output enable. High holds the data output drivers in a high impedance (High-Z) state. Low the data output driver state is defined by NCS, NSL and NWE. If not used, it must be connected to VSS.                                                                                                                                                                                                               |
| NSL      | P             | Not Sleep. High allows normal read or write operation. Low puts the SRAM into a deselected condition and holds the data output drivers in a high impedance (High-Z) state and disables all the input buffers except the NCS and NOE input buffers. If not used, it must be connected to VDD. The HX6408 may be ordered without the sleep mode option and pin 36 is then a no-connect (NC) and must be connected to VSS. |
| VDD      |               | Power input. Supplies power to the SRAM.                                                                                                                                                                                                                                                                                                                                                                                |
| VSS      |               | Ground                                                                                                                                                                                                                                                                                                                                                                                                                  |

## TRUTH TABLE

| NCS | NSL | NWE | NOE | Mode         | DQ Mode  |
|-----|-----|-----|-----|--------------|----------|
| X   | L   | X   | X   | Sleep        | High-Z   |
| H   | H   | X   | X   | Deselected   | High-Z   |
| L   | H   | H   | L   | Read         | Data Out |
| L   | H   | H   | H   | Read Standby | High-Z   |
| L   | H   | L   | X   | Write        | Data In  |

## Available Device Types: Total Dose / Sleep Mode / Access Time

| Device Type | Total Dose (rad(Si)) | Sleep Mode | Access Time (ns) |
|-------------|----------------------|------------|------------------|
| 01          | $3 \times 10^5$      | Non-Sleep  | 25               |
| 02          | $3 \times 10^5$      | Non-Sleep  | 20               |
| 03          | $3 \times 10^5$      | Sleep      | 25               |
| 04          | $3 \times 10^5$      | Sleep      | 20               |
| 05          | $1 \times 10^6$      | Non-Sleep  | 25               |

## ABSOLUTE MAXIMUM RATINGS (1)

| Symbol      | Parameter                                                     | Ratings |           | Unit |
|-------------|---------------------------------------------------------------|---------|-----------|------|
|             |                                                               | Min     | Max       |      |
| VDD         | Positive Supply Voltage Referenced to VSS                     | -0.5    | 4.6       | V    |
| VIO         | Voltage on Any Input or Output Pin Referenced to VSS          | -0.5    | VDD + 0.5 | V    |
| IOUT        | Average Output Current                                        |         | 25        | mA   |
| TSTORE      | Storage Temperature                                           | -65     | 150       | °C   |
| TSOLDER (2) | Soldering Temperature                                         |         | 270       | °C   |
| PD (3)      | Package Power Dissipation                                     |         | 2.5       | W    |
| PJC         | Package Thermal Resistance (Junction to Case)                 |         | 2.0       | °C/W |
| VHBM        | Electrostatic Discharge Protection Voltage (Human Body Model) | 2000    |           | V    |
| TJ          | Junction Temperature                                          |         | 175       | °C   |

(1) Stresses in excess of those listed above may result in immediate permanent damage to the device. These are stress ratings only and operation at these levels is not implied. Frequent or extended exposure to absolute maximum conditions may affect device reliability.

(2) Maximum soldering temperature can be maintained for no more than 5 seconds.

(3) IDDSB power + IDDOP power + Output driver power due to external loading must not exceed this specification.

## RECOMMENDED OPERATING CONDITIONS (1)

| Symbol | Parameter                                            | Limits |     |           | Unit |
|--------|------------------------------------------------------|--------|-----|-----------|------|
|        |                                                      | Min    | Typ | Max       |      |
| VDD    | Positive Supply Voltage Referenced to VSS            | 3.0    | 3.3 | 3.6       | V    |
| TC     | Case Temperature                                     | -55    | 25  | 125       | °C   |
| VIO    | Voltage on Any Input or Output Pin Referenced to VSS | -0.3   |     | VDD + 0.3 | V    |
| TRAMP  | VDD Power Supply Ramp Rate                           |        |     | 50        | ms   |

(1) Specifications listed in datasheet apply when operated under the Recommended Operating Conditions unless otherwise specified.

**RADIATION HARDNESS RATINGS (1)**

| Symbol  | Parameter                         | Environment Conditions                                                                       | Limits              | Unit              |
|---------|-----------------------------------|----------------------------------------------------------------------------------------------|---------------------|-------------------|
| TID     | Total Ionizing Dose, F-Level      |                                                                                              | $3 \times 10^5$     | rad(Si)           |
|         | Total Ionizing Dose, H-Level      |                                                                                              | $1 \times 10^6$     | rad(Si)           |
| DRU     | Transient Dose Rate Upset         | Pulse width $\leq 20$ ns                                                                     | $1 \times 10^{10}$  | rad(Si)/s         |
| DRS     | Transient Dose Rate Survivability | Pulse width $\leq 20$ ns                                                                     | $1 \times 10^{12}$  | rad(Si)/s         |
| SER (2) | Projected Soft Error Rate         | Geosynchronous orbit during solar minimum non-flare conditions behind 100mil Aluminum shield | $1 \times 10^{-10}$ | upsets/bit-day    |
|         | Neutron Irradiation Damage        | 1 MeV equivalent energy                                                                      | $1 \times 10^{14}$  | n/cm <sup>2</sup> |

(1) Device will not latchup when exposed to any of the specified radiation environments.

(2) Calculated using CREME96.

**RADIATION CHARACTERISTICS****Total Ionizing Dose Radiation**

The SRAM radiation hardness assurance TID level was qualified by <sup>60</sup>Co testing, including overdose and accelerated annealing, per MIL-STD-883 Method 1019. Ongoing assurance is provided by wafer level X-ray testing during manufacturing.

**Single Event Soft Error Rate**

Special process, memory cell, circuit and layout design considerations are included in the SRAM to minimize the impact of heavy ion and proton radiation and achieve small projected SER. These techniques sufficiently harden the SRAM such that cell redundancy and scrubbing are not required to achieve the projected SER.

**Transient Dose Rate Ionizing Radiation**

Many aspects of product design are addressed to handle the high energy levels associated with the transient dose rate events. This allows the SRAM to be capable of writing, reading, and retaining stored

data during and after exposure to a transient dose rate ionizing radiation pulse, up to the DRU specification. The SRAM will also meet functional and timing specifications after exposure to a transient dose rate ionizing radiation pulse up to the DRS specification.

**Neutron Irradiation Damage**

SOI CMOS is inherently tolerant to damage from neutron irradiation. The SRAM meets functional and timing specifications after exposure to the specified neutron fluence.

**Latchup**

The SRAM will not latchup when exposed to any of the above radiation environments when applied under recommended operating conditions. SOI CMOS provides oxide isolation between adjacent PMOS and NMOS transistors and eliminates any potential SCR latchup structures.

**PIN CAPACITANCE (1)**

| Symbol | Parameter            | Max | Unit |
|--------|----------------------|-----|------|
| CIN    | Input Capacitance    | 11  | pF   |
| CDQ    | Data I/O Capacitance | 9   | pF   |

(1) Maximum capacitance is verified as part of initial qualification only.

# HX6408

## POWER PIN ELECTRICAL CHARACTERISTICS

| Symbol         | Parameter                              | Conditions                                                          | Max   | Unit |    |
|----------------|----------------------------------------|---------------------------------------------------------------------|-------|------|----|
| IDDSB          | Static Supply Current                  | VIH = VDD,<br>VIL = VSS,<br>DQ = High-Z                             | 10    | mA   |    |
| IDDOPW (1)(2)  | Dynamic Supply Current Selected, Write | VIH = VDD,<br>VIL = VSS,<br>DQ = High-Z                             | 1MHz  | 9    | mA |
|                |                                        |                                                                     | 2MHz  | 17.9 | mA |
|                |                                        |                                                                     | 10MHz | 89   | mA |
|                |                                        |                                                                     | 25MHz | 160  | mA |
|                |                                        |                                                                     | 40MHz | 260  | mA |
| IDDOPR (1)(2)  | Dynamic Supply Current Selected, Read  | VIH = VDD,<br>VIL = VSS,<br>DQ = High-Z                             | 1MHz  | 4.4  | mA |
|                |                                        |                                                                     | 2MHz  | 9    | mA |
|                |                                        |                                                                     | 10MHz | 40   | mA |
|                |                                        |                                                                     | 25MHz | 100  | mA |
|                |                                        |                                                                     | 40MHz | 160  | mA |
| IDDOPD1 (1)(2) | Dynamic Supply Current Deselected      | VIH = VDD,<br>VIL = VSS,<br>NSL = VIH,<br>DQ = High-Z               | 1MHz  | 1.5  | mA |
| IDDOPD2 (1)(2) | Dynamic Supply Current Sleep           | VIH = VDD,<br>VIL = VSS,<br>NSL = VIL,<br>DQ = High-Z               | 1MHz  | 0.2  | mA |
| IDDOPD3 (1)(2) | Dynamic Supply Current Deselected      | VIH = VDD,<br>VIL = VSS,<br>NWE = VIH,<br>NSL = VIH,<br>DQ = High-Z | 40MHz | 24   | mA |
| IDR            | Data Retention Supply Current          | VDD = 2.0V                                                          | 3     | mA   |    |

(1) All inputs switching. DC average current.

(2) All dynamic operating mode current measurements (IDDOPx) exclude standby mode current (IDDSB). The total power is the sum of the power from the standby current (IDDSB), dynamic current (IDDOPx) and output driver current driving the output load.

## SIGNAL PIN ELECTRICAL CHARACTERISTICS (1)

| Symbol | Parameter                 | Conditions      | Min       | Max       | Unit |
|--------|---------------------------|-----------------|-----------|-----------|------|
| IIN    | Input Leakage Current     | VSS ≤ VIN ≤ VDD | -5        | 5         | uA   |
| IOZ    | Output Leakage Current    | DQ = High-Z     | -10       | 10        | uA   |
| VIL    | Low-Level Input Voltage   |                 |           | 0.3 x VDD | V    |
| VIH    | High-Level Input Voltage  |                 | 0.7 x VDD |           | V    |
| VOL    | Low-Level Output Voltage  | IOL = 8mA       |           | 0.4       | V    |
| VOH    | High-Level Output Voltage | IOH = -4mA      | 2.7       |           | V    |


(1) Voltages referenced to VSS.

**READ CYCLE TIMING CHARACTERISTICS (1)(2)**

| Symbol    | Parameter                                 | Limits<br>Devices<br>(02, 04) |     | Limits<br>Devices<br>(01, 03, 05) |     | Unit |
|-----------|-------------------------------------------|-------------------------------|-----|-----------------------------------|-----|------|
|           |                                           | Min                           | Max | Min                               | Max |      |
| TAVAVR    | Read Cycle Time                           | 20                            |     | 25                                |     | ns   |
| TAVQV     | Address Valid to Output Valid Access Time |                               | 20  |                                   | 25  | ns   |
| TAXQX     | Address Change to Output Invalid Time     | 5                             |     | 5                                 |     | ns   |
| TSLQV     | Chip Select to Output Valid Access Time   |                               | 20  |                                   | 25  | ns   |
| TSLQX     | Chip Select to Output Low-Z Time          | 4                             |     | 4                                 |     | ns   |
| TSHQZ     | Chip Select to Output High-Z Time         |                               | 4   |                                   | 4   | ns   |
| TPHQV (3) | Sleep Enable to Output Valid Access Time  |                               | 25  |                                   | 25  | ns   |
| TPHQX (3) | Sleep Enable to Output Low-Z Time         | 5                             |     | 5                                 |     | ns   |
| TPLQZ (3) | Sleep Enable to Output High-Z Time        |                               | 10  |                                   | 10  | ns   |
| TGLQV     | Output Enable to Output Valid Access Time |                               | 5   |                                   | 5   | ns   |
| TGLQX     | Output Enable to Output Low-Z Time        | 0.4                           |     | 0.4                               |     | ns   |
| TGHQZ     | Output Enable to Output High-Z Time       |                               | 3   |                                   | 3   | ns   |

- (1) The timing specifications are referenced to the Timing Input / Output References diagrams and the Timing Reference Load Circuit diagrams. IBIS models should be used to evaluate timing under application load and conditions.
- (2) NWE = High
- (3) Sleep Mode parameters only apply to device types 03 and 04.

**READ CYCLE TIMING WAVEFORMS**

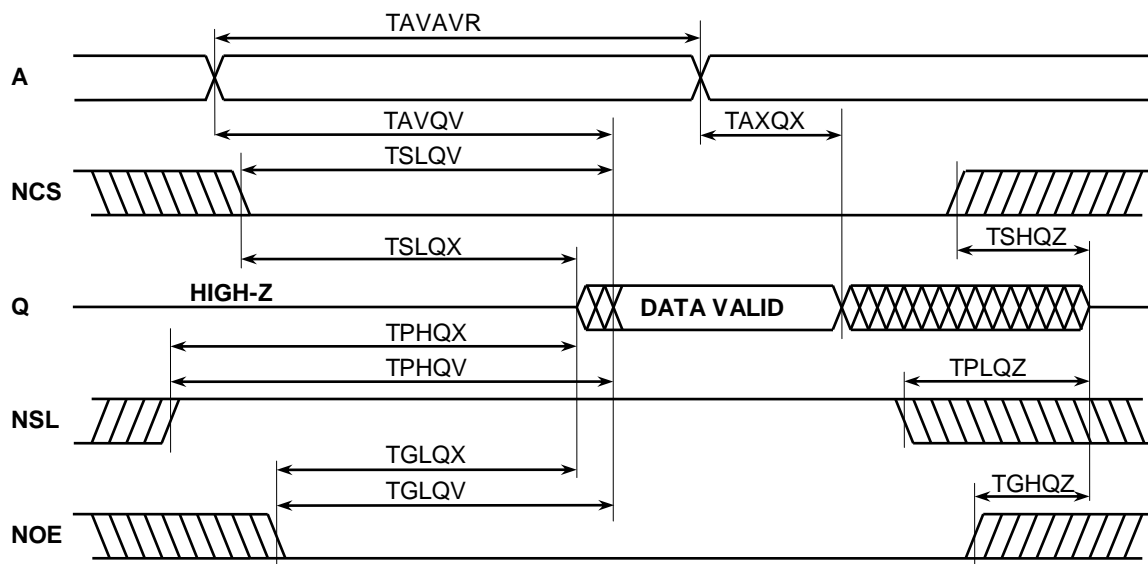


**WRITE CYCLE TIMING CHARACTERISTICS (1)(2)(3)**

| Symbol    | Parameter                                  | Limits Devices (02, 04) |     | Limits Devices (01, 03, 05) |     | Unit |
|-----------|--------------------------------------------|-------------------------|-----|-----------------------------|-----|------|
|           |                                            | Min                     | Max | Min                         | Max |      |
| TAVAVW    | Write Cycle Time                           | 20                      |     | 25                          |     | ns   |
| TWLWH     | Start of Write to End of Write Pulse Width | 15                      |     | 25                          |     | ns   |
| TSLWH     | Chip Select to End of Write Time           | 16                      |     | 20                          |     | ns   |
| TPHWH (4) | Sleep Disable to End of Write Time         | 25                      |     | 25                          |     | ns   |
| TDVWH     | Data Input Valid to End of Write Time      | 12                      |     | 15                          |     | ns   |
| TAVWH     | Address Valid to End of Write Time         | 20                      |     | 25                          |     | ns   |
| TWHDX     | Data Input Hold after End of Write Time    | 0                       |     | 0                           |     | ns   |
| TAVWL     | Address Valid Setup to Start of Write Time | 0                       |     | 0                           |     | ns   |
| TWHAX     | Address Valid Hold after End of Write Time | 0                       |     | 0                           |     | ns   |
| TWLQZ     | Start of Write to Output High-Z Time       |                         | 6   |                             | 6   | ns   |
| TWHQX     | End of Write to Output Low-Z Time          | 6                       |     | 6                           |     | ns   |
| TWHWL (5) | End of Write to Start of Write Pulse Width | 5                       |     | 5                           |     | ns   |


- (1) The timing specifications are referenced to the Timing Input / Output References diagrams and the Timing Reference Load Circuit diagrams. IBIS models should be used to evaluate timing under application load and conditions.
- (2) For an NWE controlled write, NCS must be Low and NSL must be High when NWE is Low.
- (3) Can use NOE = High to hold Q in a High-Z state when NWE = High, NCS = Low and NSL = High.
- (4) Sleep Mode parameters only apply to device types 03 and 04.
- (5) Guaranteed but not tested.

**WRITE CYCLE TIMING WAVEFORMS**

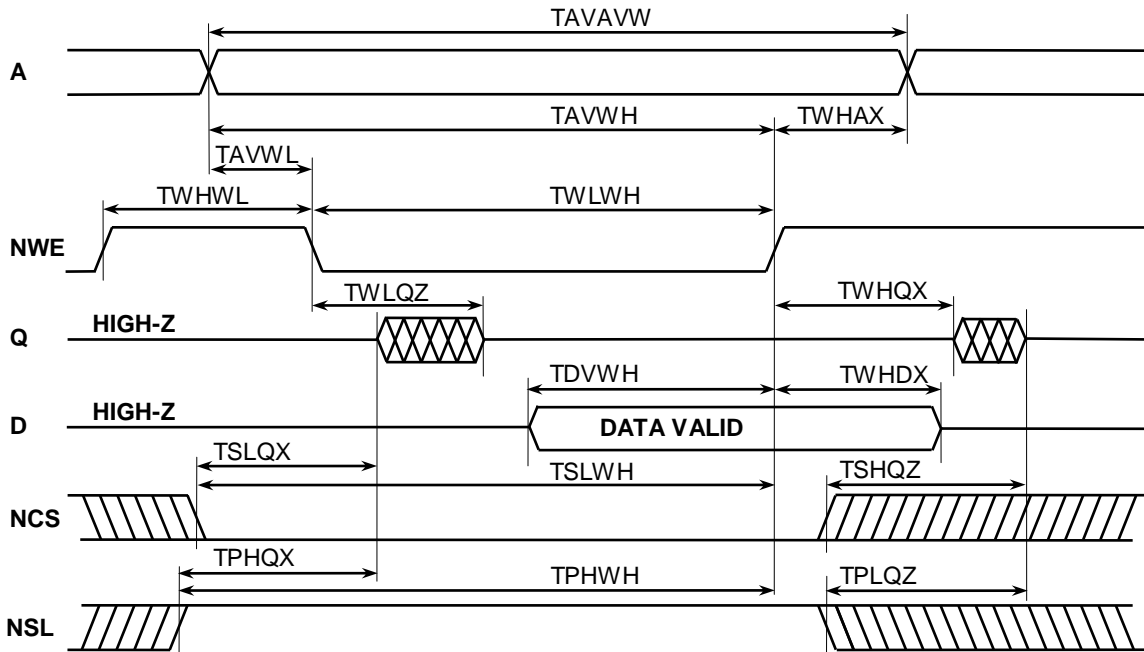




## TIMING INPUT / OUTPUT REFERENCES

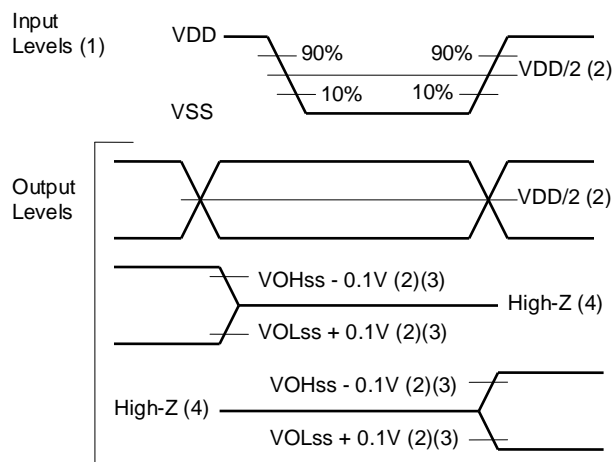

## Notes

- (1) Input rise and fall times = 1 ns between 90% and 10% levels.
- (2) Timing parameter reference voltage level.
- (3) ss: Low-Z VOH and VOL steady-state output voltage.
- (4) High-Z output pin pulled to VDD/2 by Reference Load Circuit.

## TIMING REFERENCE LOAD CIRCUIT

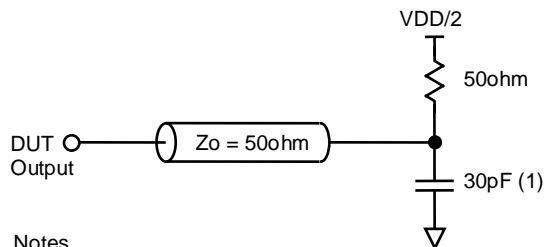

## Notes

- (1) Set to 5pF for T\*QZ (Low-Z to High-Z) timing parameters.

## FUNCTIONAL DESCRIPTION

## SRAM Operation

SRAM operation is asynchronous. Operating modes are defined in the Truth Table. Read operations can be controlled by Address (A), Sleep (NSL) or Chip Select (NCS). Write operations can be controlled by Write Enable (NWE), Sleep (NSL) or Chip Select (NCS).

## Read Operation

A read operation occurs when Chip Select (NCS) is low and Sleep (NSL) and Write Enable (NWE) are high. The output drivers are controlled independently by the Output Enable (NOE) signal.

To control a read cycle with NCS/NSL where TSLQV/TPHQV is the access time, all addresses must be valid TAVQV minus TSLQV/TPHQV prior to the enabling NCS/NSL transition. Address transitions can occur later; however, the valid Data Output (Q) access time will then be defined by TAVQV instead of TSLQV/TPHQV. NCS/NSL can disable the read at any time; however, Data Output drivers will enter a High-Z state TSHQZ/TPLQZ later.

To control a read cycle with Address where TAVQV is the access time, NCS/NSL must transition to active TSLQV/TPHQV minus TAVQV prior to the last

Address transition. The NCS/NSL active transition can occur later; however, the valid Data Output (Q) access time will then be defined by TSLQV/TPHQV instead of TAVQV. To perform consecutive read cycles, NCS/NSL is held continuously low/high, and the toggling of any Address will start a new read cycle. Any amount of toggling or skew between Address transitions is permissible; however, Data Output will not become valid until TAVQV following the last occurring Address transition. The minimum Address activated read cycle time is TAVAVR which is the time between the last Address transition of the previous cycle and the first Address transition of the next cycle. The valid Data Output from a previous cycle will remain valid until TAXQX following the first Address transition of the next cycle.

## Write Operation

A write operation occurs when Write Enable (NWE) and Chip Select (NCS) are low and Sleep (NSL) is high. The write mode can be controlled via three different control signals: NWE, NCS or NSL can start the write mode and end the write mode, but the write operation itself is defined by the overlap of NWE low, NCS low and NSL high. All three modes of control are similar, except the NCS and NSL controlled

## HX6408

modes deselect the SRAM when NCS is high or NSL is low between writes.

To write Data (D) into the SRAM, NWE and NCS must be held low and NSL must be held high for at least TWLWH, TSLSH and TPHPL respectively. Any amount of skew between these signal transitions can be tolerated, and any one of these control signals can start or end the write operation as long as there is sufficient overlap in these signals to ensure a valid write time (e.g., TSLWH, TWLSH, TPHWH and TWLPL).

Address inputs must be valid at least TAVWL/TAVSL/TAVPH before the start of write and TAVWH/TAVSH/TAVPL before the end of write and must remain valid during the write operation. Hold times for address inputs with respect to the end of write must be a minimum of TWHAX/TSHAX/TPLAX. A Data Input (D) valid to the end of write time of TDVWH/TDVSH/TDVPL must be provided during the write operation. Hold times for Data Input with respect to the end of write must be at least TWHDX/TSHDX/TPLDX. To avoid Data Input driver contention with the SRAM output driver, the Data Input (D) must not be applied until TWLQZ/TGHQZ/TSHQZ/TPLQZ after the output drive (Q) is put into a High-Z condition by NWE/NOE/NCS/NSL.

Consecutive write cycles are performed by toggling at least one of the start of write control signals for TWHWL/TSHSL/TPLPH. If only one of these signals is used, the other two must be in their write enable states. The minimum write cycle time is TAVAVW/TAVAVS/TAVAVP.

### Signal Integrity

As a general design practice, one should have good signal integrity which means input signals that are free of noise, glitches and ringing with rising and falling edges of  $\leq 10\text{ns}$ . More specifically, an input is considered to have good signal integrity when the input voltage monotonically traverses the region between VIL and VIH in  $\leq 10\text{ns}$ . This is especially important in a selected and enabled state. When the device is selected and enabled, the last transitioning input for the desired operation must have good signal integrity to maintain valid operation. The transitioning inputs that bring the device into and out of a selected and enabled state must also have good signal integrity to maintain valid operation. When the device is deselected and/or disabled, inputs can have poor signal integrity and even float as long as the inputs that are defining the deselected and/or disabled state stay within valid VIL and VIH voltage levels. However, floating inputs for an extended period of time is not recommended.

**RELIABILITY**

For many years Honeywell has been producing integrated circuits that meet the stringent reliability requirements of space and defense systems. Honeywell has delivered hundreds of thousands of QML parts since first becoming QML qualified in 1990. Using this proven approach Honeywell will assure the reliability of the products manufactured with the SOI CMOS process technology. This approach includes adhering to Honeywell’s Quality Management Plan for:

- Designing in reliability by establishing electrical rules based on wear out mechanism characterization performed on specially designed test structures (electromigration, TDDB, hot carriers, bias temperature instability and radiation).
- Utilizing a structured and controlled design process.
- Statistically controlling wafer fabrication process with a continuous defect reduction process.
- Performing individual wafer lot acceptance through process monitor testing (includes radiation testing).
- Using characterized and qualified packages.
- Performing thorough product testing program based on MIL-PRF-38535 and MIL-STD 883.

**SCREENING AND CONFORMANCE INSPECTION**

The product test flow includes screening units with the applicable flow (Engineering Model, Class V or equivalent, Class Q or equivalent) and the appropriate periodic or lot Conformance Testing (Groups A, B, C, D, and E). Both the wafer process and the products are subject to periodic or lot based Technology Conformance Inspection (TCI) / Quality Conformance Inspection (QCI) tests as defined by Honeywell’s Quality Management Plan.

**Conformance Testing Summary**


|         |                                                                                                                                                                                                                                         |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Group A | General Electrical Tests                                                                                                                                                                                                                |
| Group B | Mechanical – Resistance to Solvents, Bond Strength, Die Shear, Solderability                                                                                                                                                            |
| Group C | Life Tests - 1000 hours at 125C or equivalent                                                                                                                                                                                           |
| Group D | Package Related Mechanical Tests – Physical Dimensions, Lead Integrity, Thermal Shock, Temp Cycle, Moisture Resistance, Seal, Mechanical Shock, Vibration, Acceleration, Salt Atmosphere, Internal Water Vapor, Adhesion of Lead Finish |
| Group E | Radiation Tests                                                                                                                                                                                                                         |

# HX6408

## PACKAGE FEATURES



| Feature                   | Description                       |
|---------------------------|-----------------------------------|
| Designation               | X                                 |
| Type                      | 36-lead flat pack                 |
| Body Construct            | multi-layer ceramic ( $Al_2O_3$ ) |
| Power Planes              | Yes                               |
| Lid Construct             | Kovar                             |
| Lid Electrical Connection | VSS                               |

## PACKAGE DIAGRAMS

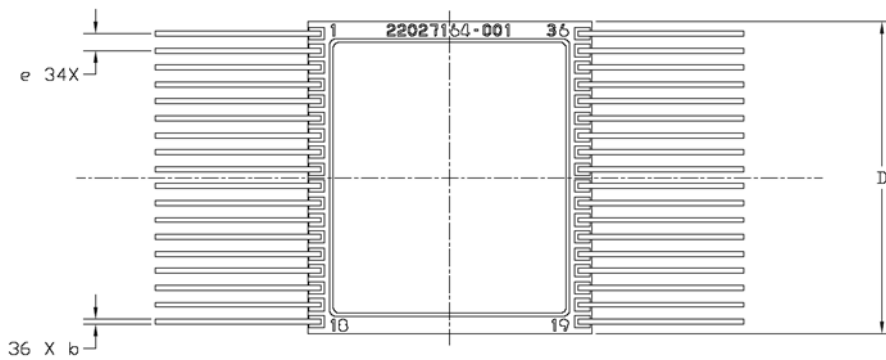

COMMON DIMENSIONS (in.)

| SYM | MIN. | NOM. | MAX. |
|-----|------|------|------|
| A   | .102 | .113 | .125 |
| A1  | .085 | .095 | .105 |
| B   | .016 | .018 | .020 |
| C   | .004 | .006 | .008 |
| D   | .910 | .920 | .930 |
| E   | .045 | .050 | .055 |
| E1  | .832 | .840 | .848 |
| L   | ---- | .450 | ---- |
| Q   | ---- | .104 | ---- |

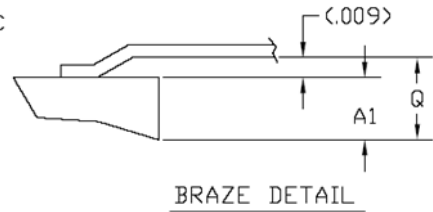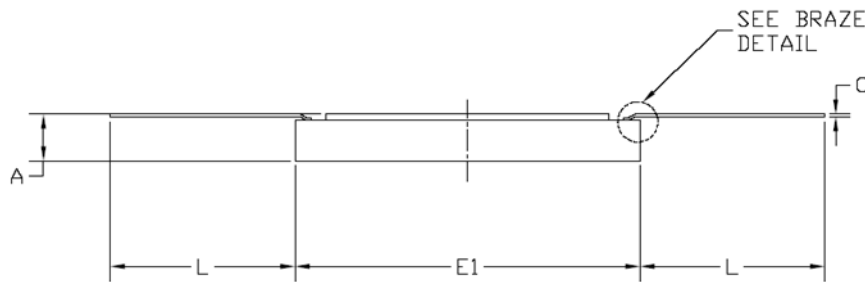

## ORDERING INFORMATION (1)

### Standard Microcircuit Drawing (SMD)

The QML qualified HX6408 SRAM can be ordered under the SMD drawing 5962-06203.

#### Order Code

|                                                                                           | H | X | 6408 | X | V | H | N | 25 |
|-------------------------------------------------------------------------------------------|---|---|------|---|---|---|---|----|
| <b>SOURCE</b>                                                                             |   |   |      |   |   |   |   |    |
| H = Honeywell                                                                             |   |   |      |   |   |   |   |    |
| <b>PROCESS</b>                                                                            |   |   |      |   |   |   |   |    |
| X = SOI                                                                                   |   |   |      |   |   |   |   |    |
| <b>PART NUMBER</b>                                                                        |   |   |      |   |   |   |   |    |
| 6408 = 512k x 8 SRAM                                                                      |   |   |      |   |   |   |   |    |
| <b>PACKAGE DESIGNATION</b>                                                                |   |   |      |   |   |   |   |    |
| X = 36 Lead CFP<br>K = Known Good Die (3)                                                 |   |   |      |   |   |   |   |    |
| <b>SCREEN LEVEL</b>                                                                       |   |   |      |   |   |   |   |    |
| V = QML Class V<br>Q = QML Class Q<br>Z = Class V Equivalent<br>E = Engineering Model (2) |   |   |      |   |   |   |   |    |
| <b>TOTAL DOSE HARDNESS (4)</b>                                                            |   |   |      |   |   |   |   |    |
| F = $3 \times 10^5$ rad(Si)<br>H = $1 \times 10^6$ rad(Si)<br>N = No Level Guaranteed (2) |   |   |      |   |   |   |   |    |
| <b>MODE (4)</b>                                                                           |   |   |      |   |   |   |   |    |
| N = Non-Sleep Mode<br>M = Sleep Mode                                                      |   |   |      |   |   |   |   |    |
| <b>ACCESS TIME (4)</b>                                                                    |   |   |      |   |   |   |   |    |
| 20 = 20ns<br>25 = 25ns                                                                    |   |   |      |   |   |   |   |    |

- (1) Orders may be faxed to 763-954-2051.  
Please contact our Customer Service Representative at 763-954-2474 or 1-800-323-8295 for further information.
- (2) Engineering Model Description: Screen Level and Total Dose Hardness codes must be "E" and "N" respectively.  
Parameters are tested -55°C to 125°C, 24 hour burn-in, no radiation hardness guaranteed.
- (3) Information herein applies to packaged parts. Contact Honeywell for known good die information.
- (4) See Available Device Types Table for valid part offerings.

## FIND OUT MORE

For more information about Honeywell's family of radiation hardened integrated circuit products and services, visit [www.honeywellmicroelectronics.com](http://www.honeywellmicroelectronics.com).

*Honeywell reserves the right to make changes of any sort without notice to any and all products, technology and testing identified herein. You are advised to consult Honeywell or an authorized sales representative to verify that the information in this data sheet is current before ordering this product. Absent express contract terms to the contrary, Honeywell does not assume any liability of any sort arising out of the application or use of any product or circuit described herein; nor does it convey any license or other intellectual property rights of Honeywell or of third parties.*